

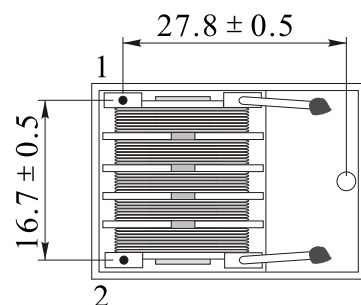
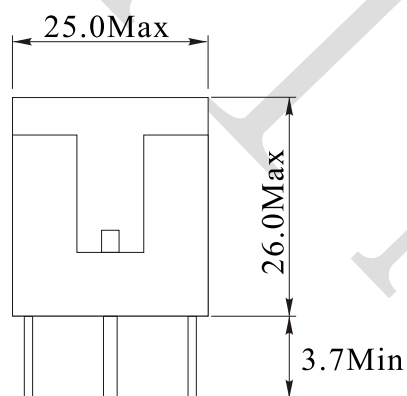
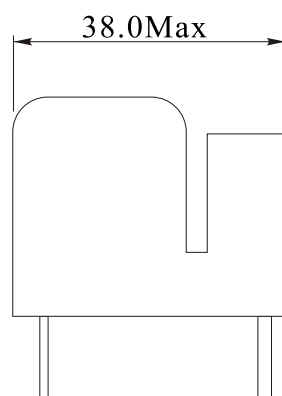


Rev.	Description	Date
A0	New release	2020.04.28

1. PHYSICAL CHARACTERISTICS(mm)

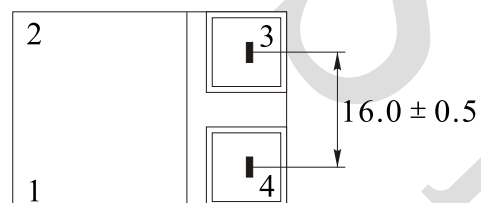

2. ELECTRONICAL SCHEMATIC

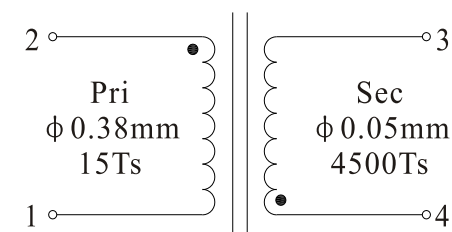

3. ELECTRONICAL SPECIFICATIONS

Inductance: Pin2-1: 10uH $\pm$ 20% @ 1KHz, 0.3V

Pin4-3: 500mH $\pm$ 20% @ 1KHz, 0.3V

Turns ratio: Sec: Pri = 300 Ref

DCR: Pin2-1: 80m Ω $\pm$ 20%

Pin4-3: 1600 Ω $\pm$ 20%

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NEME:	Ignition transformer		
CUSTOMER P/N:	2179	DATE:	2020-04-28
SHINHOM P/N:	HT2528V-241-2	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

TEL: +86-029-87851838
FAX: +86-029-87851840
ZIP: 710054
Http://www.shinhom.com
E-mail: shinhom@globalsources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China